

INSULATED RING TERMINALS

0,25 – 6 mmq





MATERIAL

99,9 tinned electrolytic copper Cu

Self extinguishing PVC

ALL TERMINALS CAN BE SUPPLIED WITH A SPECIAL ANTI VIBRATION COPPER SLEEVE TO GUARANTEE A DOUBLE CONNECTION ON THE COLLAR ATTACHED TO CABLE

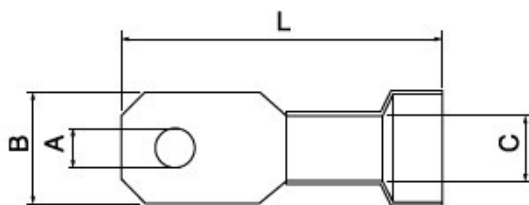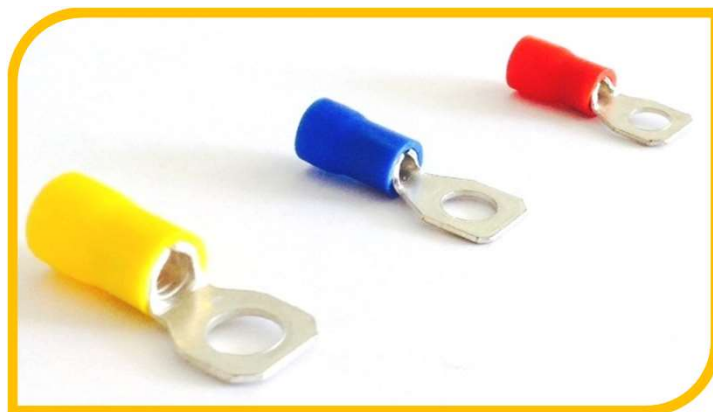

ARTICOLO ARTICLE	COLORE COLOUR	SEZIONE WIRE RANGE mm ²	AWG	Ø A FORO VITE SCREW HOLE	B	C	L	PEZZI PER CONFEZ. PCS PER PACK.	BLISTER con codice a barre with barcode	
A2/P	Red	0,25+1,5	22+16	2,4	5,7	1,8	18,5	1000	100	
A3/P		0,25+1,5	22+16	3,6	5,7	1,8	18,5	1000	100	
A4/P		0,25+1,5	22+16	4,2	7	1,8	19,5	1000	100	
A5/P		0,25+1,5	22+16	5,2	8	1,8	20,5	1000	100	
A6/P		0,25+1,5	22+16	6,2	10	1,8	24,5	1000	100	
A8/P		0,25+1,5	22+16	8,2	12	1,8	25	1000	100	
A10/P		0,25+1,5	22+16	10,2	13	1,8	28,5	1000	100	
B3/P		Blue	1,5+2,5	16+14	3,6	6,4	2,4	20,5	1000	100
B4/P			1,5+2,5	16+14	4,2	6,4	2,4	20,5	1000	100
B5/P			1,5+2,5	16+14	5,2	8,5	2,4	22	1000	100
B6/P	1,5+2,5		16+14	6,2	9,4	2,4	23,5	1000	100	
B8/P	1,5+2,5		16+14	8,2	13	2,4	29	1000	50	
B10/P	1,5+2,5		16+14	10,2	13	2,4	29	1000	50	
B12/P	1,5+2,5	16+14	12,2	18	2,4	35	1000	50		
C3/P	Yellow	2,5+6	12+10	3,6	6,9	3,6	26	500	50	
C4/P		2,5+6	12+10	4,2	8	3,6	26	500	50	
C5/P		2,5+6	12+10	5,2	10	3,6	26	500	50	
C6/P		2,5+6	12+10	6,2	10	3,6	26	500	50	
C8/P		2,5+6	12+10	8,2	14	3,6	31	500	50	
C10/P		2,5+6	12+10	10,2	14	3,6	31	500	50	
C12/P		2,5+6	12+10	12,2	18	3,6	38	500	50	
C140/P		2,5+6	12+10	14,2	24	3,6	42	500	50	
C160/P		2,5+6	12+10	16,2	24	3,6	42	500	50	

PRODOTTI INNOVATIVI / INNOVATIVE PRODUCTS									
C8G/L/P		2,5+6	12+10	8,2	15	3,6	32	500	100
C10G/L/P		2,5+6	12+10	10,2	15	3,6	32	500	100
C65/P ASOLA		2,5+6	12+10	5 e 6	10,6	3,6	31,5	500	50

INSULATED FORK TERMINALS

0,25 – 6 mmq




MATERIAL

99,9 tinned electrolytic copper



Self extinguishing PVC

ALL TERMINALS CAN BE SUPPLIED WITH A SPECIAL ANTI VIBRATION COPPER SLEEVE TO GUARANTEE A DOUBLE CONNECTION ON THE COLLAR ATTACHED TO CABLE

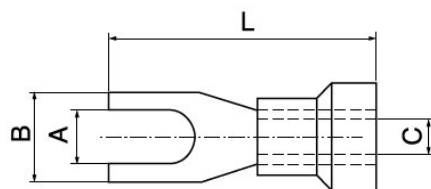

FORK TERMINALS WITH ANTI SLIP GROOVES

THE ANTI SLIP GROOVES PROVIDE A BETTER CONNECTION ON THE SCREW, THIS INCREASING ITS FUNCTIONALITY AND SAFETY



INNOVATIVE PRODUCTS

B135L/P



Fork terminal with long neck

A135S/P



Locking fork terminals "S" type

B14L/P
B16L/P



Long quarry fork terminal

ARTICOLO ARTICLE	COLORE COLOUR	SEZIONE WIRE RANGE mm ²	AWG	Ø A FORO VITE SCREW HOLE	B	C	L	PEZZI PER CONFEZ. PCS PER PACK.	BLISTER con codice a barre with barcode
A13/P	Red	0,25÷1,5	22÷16	3	5	1,8	20	1000	100
A135/P		0,25÷1,5	22÷16	3,5	5,9	1,8	18,5	1000	100
A135G/P		0,25÷1,5	22÷16	3,5	7,8	1,8	19,5	1000	100
A135S/P		0,25÷1,5	22÷16	3,5	6,5	1,8	19	1000	100
A14/P		0,25÷1,5	22÷16	4,1	6,5	1,8	20	1000	100
A15/P		0,25÷1,5	22÷16	5,2	8,5	1,8	20	1000	100
A16/P		0,25÷1,5	22÷16	6,2	10,5	1,8	21,5	1000	100
A18/P		0,25÷1,5	22÷16	8,2	12	1,8	27	1000	100
B13/P	Blue	1,5÷2,5	16÷14	3	5,5	2,4	20,5	1000	100
B135/P		1,5÷2,5	16÷14	3,5	6,3	2,4	20,5	1000	100
B135G/P		1,5÷2,5	16÷14	3,5	6	2,4	23,5	1000	100
B135L/P		1,5÷2,5	16÷14	3,5	6,3	2,4	24	1000	100
B14/P		1,5÷2,5	16÷14	4,1	6,5	2,4	20,4	1000	100
B14L/P		1,5÷2,5	16÷14	4,1	6,5	2,4	21,4	1000	100
B14S/P		1,5÷2,5	16÷14	4,1	6,5	2,4	21	1000	100
B15/P		1,5÷2,5	16÷14	5,2	9	2,4	22	1000	100
B16/P		1,5÷2,5	16÷14	6,2	10,5	2,4	24	1000	100
B16L/P		1,5÷2,5	16÷14	6,2	10,5	2,4	25	1000	100
B18/P		1,5÷2,5	16÷14	8,2	12	2,4	27	1000	100
B110/P		1,5÷2,5	16÷14	10,2	13,5	2,4	28	1000	50
B112/P	1,5÷2,5	16÷14	12,2	18	2,4	35	1000	50	
C13/P	Yellow	2,5÷6	12÷10	3,5	6,9	3,6	26	500	50
C14/P		2,5÷6	12÷10	4,3	8	3,6	27	500	50
C14S/P		2,5÷6	12÷10	4,1	8	3,6	24	500	50
C15/P		2,5÷6	12÷10	5,2	10,5	3,6	28	500	50
C16/P		2,5÷6	12÷10	6,4	11,5	3,6	30	500	50
C18/P		2,5÷6	12÷10	8,5	13	3,6	31	500	50
C110/P		2,5÷6	12÷10	10,5	15	3,6	31	500	50
C112/P		2,5÷6	12÷10	12,2	18	3,6	38	500	50

INSULATED QUICK TERMINALS

0,25 – 6 mmq




MATERIAL

99,9 TINNED ELECTROLYTIC COPPER
SELF EXTINGUISHING PVC

TYPE

MALE



INSULATED MALE


ARTICOLO ARTICLE	COLORE COLOUR	SEZIONE WIRE RANGE mm ²	AWG	LINGUETTA TONGUE A	B	C	L	PEZZI PER CONFEZ. PCS PER PACK.	BLISTER con codice a barre with barcode
A22/P	Red	0,25÷1,5	22÷16	6,3x0,8	8	1,8	21	1000	100
A32/P	Red	0,25÷1,5	22÷16	4,8x0,8	8	1,8	20	1000	100
B22/P	Blue	1,5÷2,5	16÷14	6,3x0,8	8	2,3	21	1000	100
B32/P	Blue	1,5÷2,5	16÷14	4,8x0,8	8	2,3	20	1000	100
B35/P	Blue	1,5÷2,5	16÷14	4,8x0,5	8	2,7	20	1000	100
C22/P	Yellow	2,5÷6	12÷10	6,3x0,8	8	3,6	23	500	50
C29/P	Yellow	2,5÷6	12÷10	9,9x1	9,9	3,6	26	500	50

MATERIAL

TINNED BRASS WITH ANTIVIBRATION COPPER SLEEVE
SELF EXTINGUISHING PVC

TYPE

FEMALE



FULLY INSULATED MALE

ARTICOLO ARTICLE	COLORE COLOUR	SEZIONE WIRE RANGE mm ²	AWG	LINGUETTA TONGUE A	B	C	L	PEZZI PER CONFEZ. PCS PER PACK.	BLISTER con codice a barre with barcode
A22T/P	Red	0,25÷1,5	22÷16	6,3x0,8	10,4	1,8	23	1000	50
B22T/P	Blue	1,5÷2,5	16÷14	6,3x0,8	10,4	2,3	23	1000	50
C22T/P	Yellow	2,5÷6	12÷10	6,3x0,8	10,4	3,4	26,5	500	50

INSULATED QUICK TERMINALS

0,25 – 6 mmq




MATERIAL

TINNED BRASS WITH ANTIVIBRATION COPPER SLEEVE

SELF EXTINGUISHING PVC

TYPE

MALE + FEMALE



QUICK CONNECT MALE + FEMALE

ARTICOLO ARTICLE	COLORE COLOUR	SEZIONE WIRE RANGE mm ²	AWG	LINGUETTA TONGUE A	B	C	L	PEZZI PER CONFEZ. PCS PER PACK.	BLISTER con codice a barre with barcode
A30/P	Red	0,25÷1,5	22÷16	6,3x0,8	7,8	1,8	22,2	1000	50
B30/P	Blue	1,5÷2,5	16÷14	6,3x0,8	8	2,3	23	1000	50
C30/P	Yellow	2,5÷6	12÷10	6,3x0,8	8	3,6	26	500	50


MATERIAL

99,9 TINNED ELECTROLYTIC COPPER

SELF EXTINGUISHING PVC

TYPE

MALE



BUTT CONNECTOR COPPER TINNED TUBE

ARTICOLO ARTICLE	COLORE COLOUR	SEZIONE WIRE RANGE mm ²	AWG	B	C	L	PEZZI PER CONFEZ. PCS PER PACK.	BLISTER con codice a barre with barcode
A20/P	Red	0,25÷1,5	22÷16	5	1,8	26	1000	100
B20/P	Blue	1,5÷2,5	16÷14	5,5	2,4	26	1000	100
C20/P	Yellow	2,5÷6	12÷10	7	3,6	27	500	50
D20/P	Red	10	8÷7	8,4	4,6	43	500	50

INSULATED QUICK TERMINALS

0,25 – 6 mmq





MATERIAL

TINNED BRASS WITH ANTIVIBRATION COPPER SLEEVE
SELF EXTINGUISHING PVC

TYPE

FEMALE



FEMALE SOCKET

ARTICOLO ARTICLE	COLORE COLOUR	SEZIONE WIRE RANGE mm ²	AWG	Ø A FORO VITE SCREW HOLE	B	C	L	PEZZI PER CONFEZ. PCS PER PACK.	BLISTER con codice a barre with barcode
A69/P	Red	0,25÷1,5	22÷16	4	8,7	1,8	23	1000	50
B69/P	Blue	1,5÷2,5	16÷14	5	8,7	2,3	23	1000	50
C69/P	Yellow	2,5÷6	12÷10	5	8,7	3,6	28	500	50

FULLY INSULATED MALE

ARTICOLO ARTICLE	COLORE COLOUR	SEZIONE WIRE RANGE mm ²	AWG	Ø A FORO VITE SCREW HOLE	B	C	L	PEZZI PER CONFEZ. PCS PER PACK.	BLISTER con codice a barre with barcode
A96/P	Red	0,25÷1,5	22÷16	4	8,7	1,8	21	1000	100
B96/P	Blue	1,5÷2,5	16÷14	5	8,7	2,3	21	1000	100
C96/P	Yellow	2,5÷6	12÷10	5	8,7	3,6	24	500	50

INSULATED QUICK TERMINALS

0,25 – 6 mmq





MATERIAL

99,9 TINNED ELECTROLYTIC COPPER
SELF EXTINGUISHING PVC



TYPE

MALE

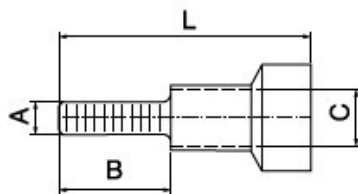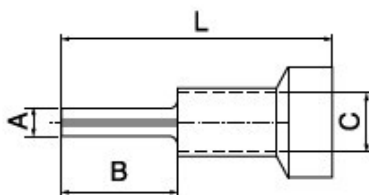

INSULATED ROUND PIN TERMINAL

ARTICOLO ARTICLE	COLORE COLOUR	SEZIONE WIRE RANGE mm ²	AWG	Ø A	B	C	L	PEZZI PER CONFEZ. PCS PER PACK.	BLISTER con codice a barre with barcode
A1C/P	Red	0,25÷1,5	22÷16	1,7	9	1,8	20,5	1000	100
A1/P		0,25÷1,5	22÷16	1,7	11	1,8	22,5	1000	100
B1C/P	Blue	1,5÷2,5	16÷14	1,8	9	2,3	19	1000	100
B1/P		1,5÷2,5	16÷14	1,8	11	2,3	22	1000	100
C1/P	Yellow	2,5÷6	12÷10	2,6	13	3,6	27,5	500	50

INSULATED FLAT PIN TERMINAL

ARTICOLO ARTICLE	COLORE COLOUR	SEZIONE WIRE RANGE mm ²	AWG	Ø A	B	C	L	PEZZI PER CONFEZ. PCS PER PACK.	BLISTER con codice a barre with barcode
A11/P	Red	0,25÷1,5	22÷16	3	12	1,8	22	1000	100
A11C/P		0,25÷1,5	22÷16	3	9	1,8	19	1000	100
A11G/P (gancio)		0,25÷1,5	22÷16	3	17	1,8	27	1000	100
A11L/P		0,25÷1,5	22÷16	2,5	17	1,8	28	1000	100
B11/P	Blue	1,5÷2,5	16÷14	3	12	2,3	24,5	1000	100
B11L/P		1,5÷2,5	16÷14	2,5	17	2,3	28	1000	100
B11G/P (gancio)		1,5÷2,5	16÷14	3	17	2,3	27,5	1000	100
C11C/P	Yellow	2,5÷6	12÷10	3,9	9	3,6	25	500	50
C11/P		2,5÷6	12÷10	3,9	13	3,6	30	500	50